

# ARMCHAIR SEWING CADDY

## Requirements

50cm Fabric (Calico or Homespun)


50cm Fuse Bat

2M Bias Binding

Small quantity of stuffing for pin cushion

Bits and pieces of lace, ribbon etc

Thread

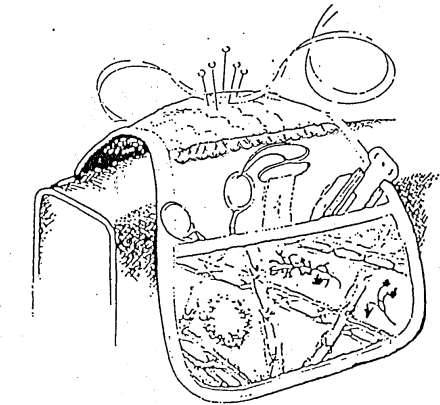

1. Cut two 60cm by 25cm rectangles of fabric and iron fuse bat on to the back of one of them then pin both pieces together ready for quilting. \_  
Quilt, using your dual feed and stitch no. 00 L 4.0. Cut out backing piece as per pattern and a 15cm square for the pin cushion.
2. Cut 4 pocket pieces and back two of them with fuse bat; the other two are for lining.
3. Decorate the padded pocket pieces with quilting, lace, ribbon, decorative stitches, applique, crazy patchwork or whatever -- the choice is yours.
4. Put pocket linings in position and bind the top edges of the pockets with bias binding.
5. Pin pockets to the main backing piece.
6. To make the pin cushion, decorate with stitching if desired and then seam into a tube. Centre the seam at the back then seam together one end and stuff. Trim open end to fit the width of the backing piece and sew across the end. Pin in place in the centre of the backing piece.
7. Zig zag right around the outside edges of the armchair caddy, keeping the stuffing of the pin cushion to the centre. Bind with the bias binding stretching slightly around the curves.

# Armchair Sewing Caddy

Background cut 1 - quilted fabric

Place on fold of fabric



Pocket

cut 4 fabric  
2 fusebat

